


combustible wall    combustible wall

Dimension 'C' is taken from door seal lip (fire box) to the front of the floor protector. All dimensions are in millimetres. All dimensions are set as a minimum guide only.

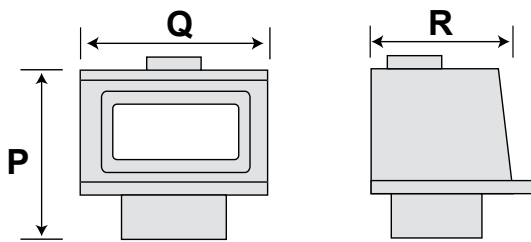

Minimum clearance requirements to combustibles with S/S 1200mm single skin flue shield and top edge diverter


A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
100	250	300	131	50	257	574	392	909	844	1139	985	587	706	647	444

Approximate Heating Area	Water Heating Option	Floor Protector	Emissions	Efficiency
130m <sup>2</sup> to 180m <sup>2</sup>	No	Non Insulated	1.34g/kg	69.6%

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F. The minimum clearance to combustibles may be reduced if the combustibles are shielded with an approved non-combustible material. Details of suitable shielding materials and appropriate clearance reduction factors are present in Section 3 of AS/NZS 2918:2001

Clean Air Authorisation # N0024

RETAIL LINKS RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE.

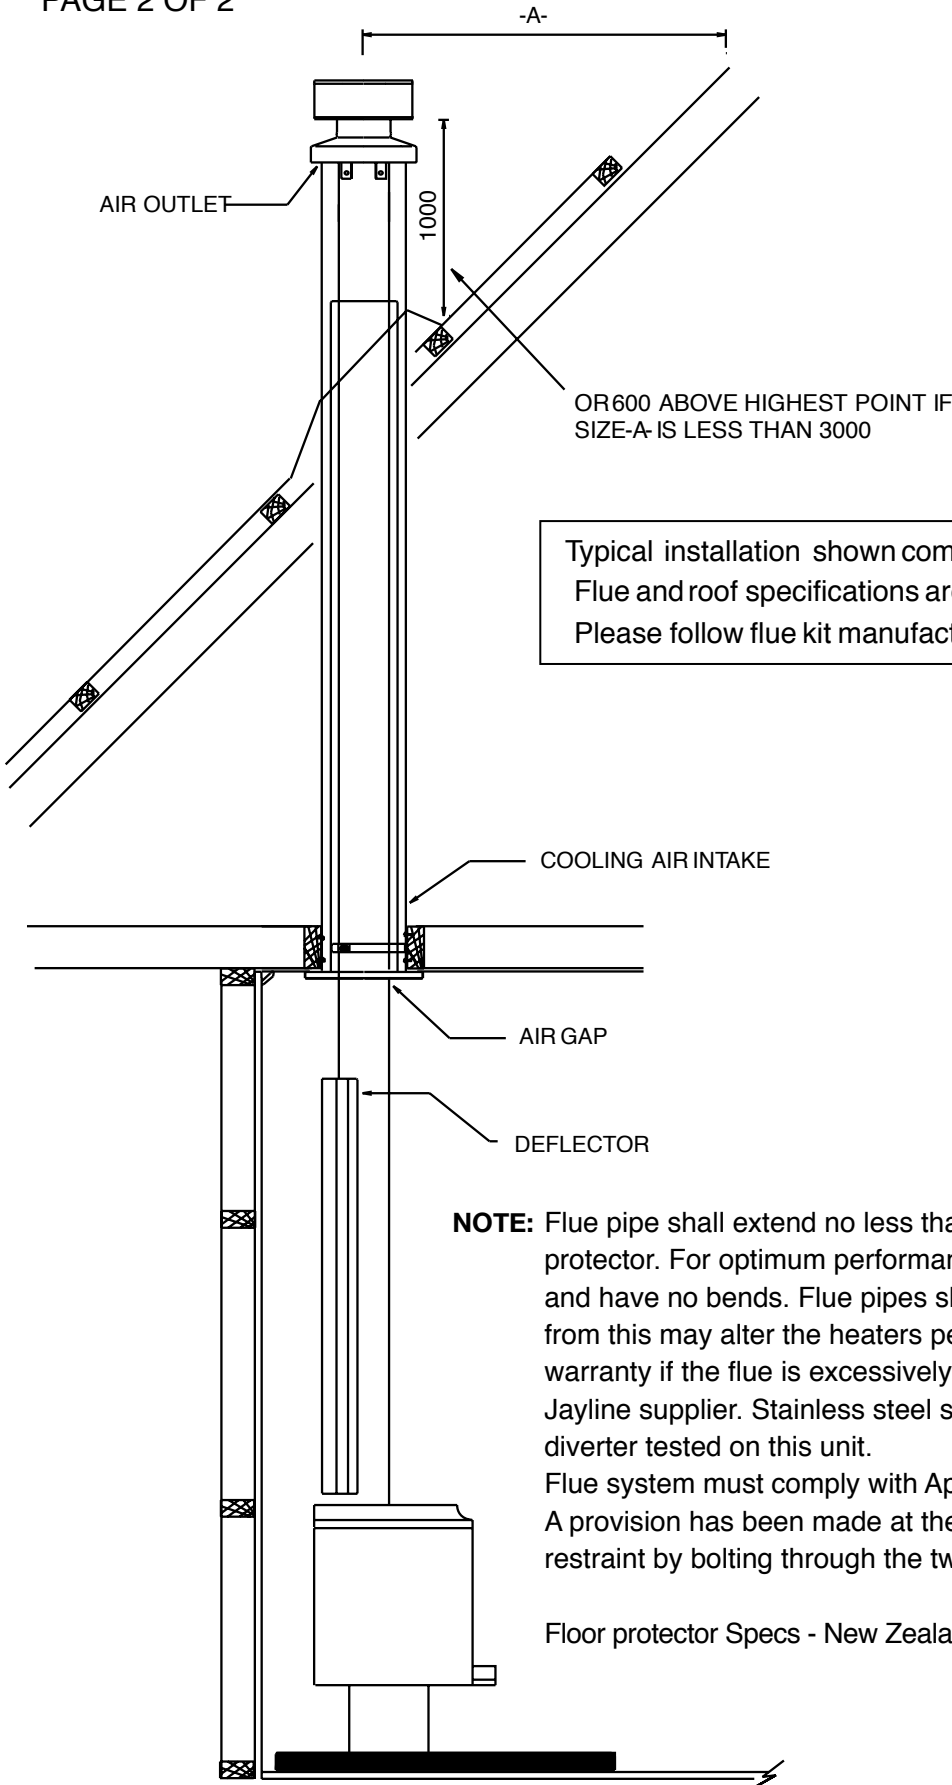

Typical installation shown complies with AS/NZS 2918:2001  
Flue and roof specifications are recommendations only.  
Please follow flue kit manufacturers installation instructions.

**NOTE:** Flue pipe shall extend no less than 4600mm above the top of the floor protector. For optimum performance the flue system should be vertical and have no bends. Flue pipes should be Ø150mm (Ø6"). Deviation from this may alter the heaters performance and may nullify the Jayline warranty if the flue is excessively long or short, if in doubt contact your Jayline supplier. Stainless steel single skin flue shield with top edge diverter tested on this unit. Flue system must comply with Appendix F of AS/NZS 2918:2001. A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided.

Floor protector Specs - New Zealand minimum non insulated floor protector only.