


Dimension 'C' is taken from door seal lip (fire box) to the front of the floor protector.
All dimensions are in millimetres.
All dimensions are set as a minimum guide only.

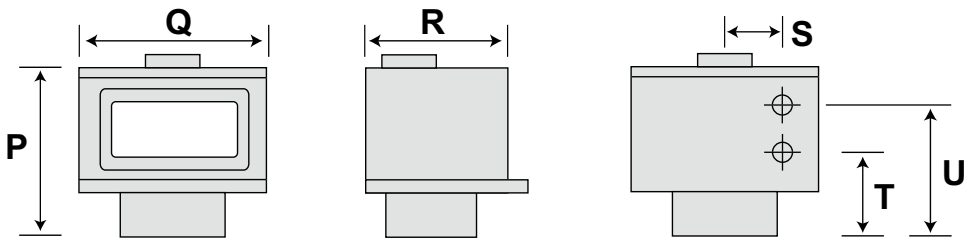

DM500 clearance requirements

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U
100	50	N/A	N/A	50	260	375	347	N/A	N/A	N/A	N/A	N/A	660	650	380	100	520	575

Approximate Heating Area	Water Heating Option	Floor Protector	Emissions	Efficiency
100m ² to 120m ²	Yes	N/A	N/A	N/A

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS1690-1975

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE.