

- A = Rear wall to top of top plate
- B = Side wall to side edge of top plate
- C = Door seal lip (fire box) to the front of the floor protector
- E = Wall to rear corner of top plate

All dimensions are in millimetres.
All dimensions are set as a minimum guide only.

Minimum clearance requirements to combustibles with 1200mm Jayline MKII double skin flue shield


| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R |
|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|------|------|-----|-----|-----|-----|
| 200 | 340 | 300 | 89 | 120 | 356 | 705 | 488 | 908 | 926 | 1259 | 1070 | 569 | 625 | 730 | 509 |

| Water Heating Option | Floor Protector | Emissions | Efficiency |
|----------------------|-----------------|-----------|------------|
| No | Non insulated | 1.37g/kg | 66.4% |

THIS MODEL HAS BEEN TESTED TO AS/NZS 2918:2001 AND IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F. The minimum clearance to combustibles may be reduced if the combustibles are shielded with an approved non-combustible material. Details of suitable shielding materials and appropriate clearance reduction factors are present in Section 3 of AS/NZS 2918:2001.

Clean Air Authorisation #N0025

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE.

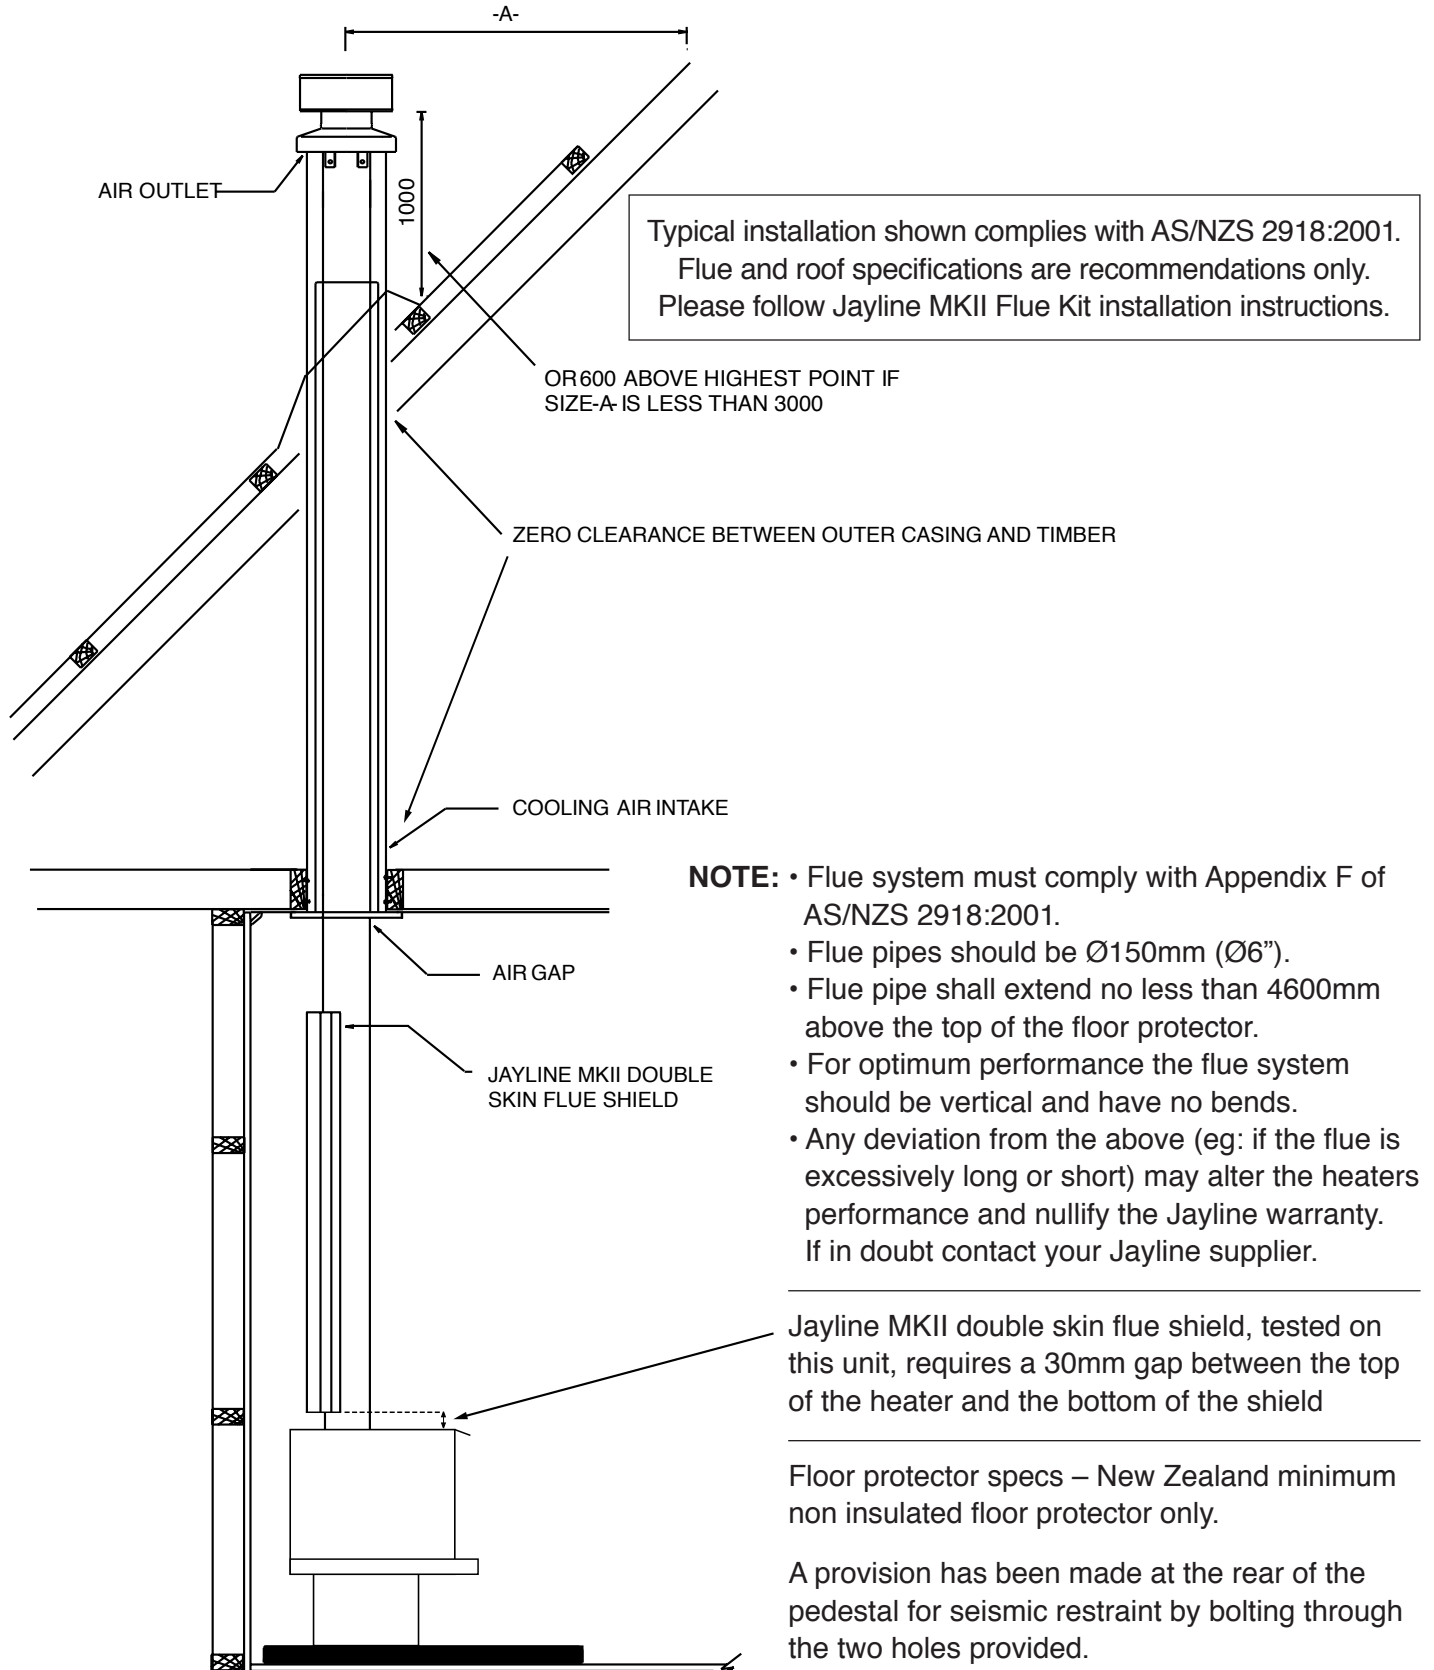

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F.